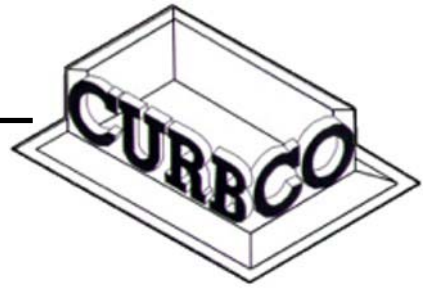

Installing a Curb Adapter



1. Remove the existing unit and any part of the original curb that is above the curb itself. Clean the top of the curb rails and the duct supports removing any old gasket or sealant material.
2. Apply a double line of butyl caulking to the perimeter of the curb and around the duct drops. Other types of caulking or gasket material may be used but butyl caulking has an active life of about 25 years. Once the butyl caulking adheres to both surfaces it will not come loose, leaving you with a good airtight seal and an excellent noise barrier.
3. Set the curb adapter on the existing curb. Screw it to the existing curb around the duct drops to insure that the supply and/or the return air does not leak and that the adapter does not slide out of place while the new unit is being installed.
4. Sit the new unit on the curb adapter and follow the unit manufacturer's installation instructions to complete the installation.

NOTE: Our curb adapters are shipped completely assembled and ready for installation. Caulking, screws, and other items required for installation are to be field supplied.